


Model: ICM-15WT  
 15.6" Industrial Chassis Monitor (Wide Screen), with Touch Screen

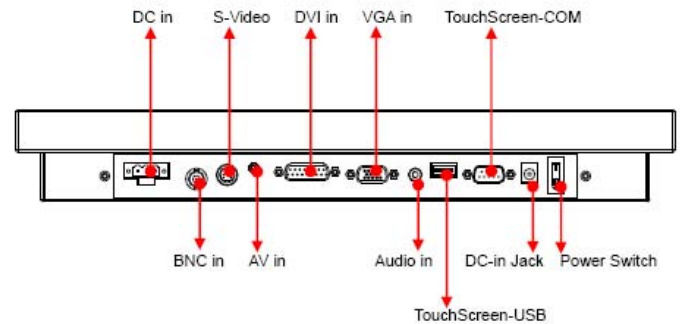

## Main Feature

- 15.6" Full HD LED Panel support 1920 × 1080 pixels
- Heavy duty steel chassis with strengthen glass
- Rugged construction design
- Input signal : VGA + DVI + Audio
- Build in 2 x 2 Watts stereo speaker
- OSD control keys to optimize the display
- AC 100-240V wide range external AC adapter
- Meet standard VESA hole ( 100x100 mm ), support desktop stand/wall mount /swing arm mounting

Specification	
Product Model	ICM-15WT
LCD Panel	Display Type : 15.6" Full HD LED Panel Resolution : 1920 x 1080 Luminance : 300 cd/m2 View Angel : 160° (H) , 160° (V) Pixel Pitch : 0.17925 x 0.17925 mm Contrast Ratio : 800 : 1 Response Time : 25 ms Max. color : 16.M LED backlight lifecycle : 50,000hrs
Signal Input	VGA ( 15 pin D-sub connector ) + DVI (DVI-D) + audio input ( audio jack )
Protect Glass	3 mm strengthen glass
Speaker	Built-in 2x stereo speakers(2watt)
OSD	Brightness, Contrast, H/V Position, Color, Phase, Clock, auto tune and recall
Touch Screen	Internal USB or RS-232 interface controller Type: Analog resistive type : 25VDC ≥ 20MΩ Resolution: continuous Light transmission: 80% or more

	Power consumption: <5V @1mA Surface hardness : 3H Operating force : ≤100g Life expectancy : 35 Million Operation system : Window XP / 7 / 10 / 11, DOS , Linux
Signal Connectivity ( optional )	AV input (S-Video, RCA, BNC)
DC Power Input ( optional )	Wide range DC 7V-28V input
Power Supply	Input: 100~240VAC,50/60Hz Output: DC12V@ 4A /48W ,external ac adapter
Construction	Heavy duty steel chassis
Environment	Operating temperature: 0 °C to 50 °C Storage temperature: -20 °C to 60 °C Storage humidity: 10% to 95%, non-condensing Vibration: 17 to 500HZ 1G PTP Shock: 1G /peak( 11m sec)
Safety	CE/FCC/Rohs
Dimension W x H x D ( mm )	Dimensions: 366.6 x225 x 47 mm
Weight	NET weight: 5KG; Gross weight: 7KG

## Ordering Information

ICM-15WT	15.6" Industrial Chassis Monitor (Wide Screen), with Touch Screen
Optional: DC	Support DC input (7-28VDC)
Optional: AV	Support AV Input (S-Video, RCA, BNC)

## Structure Diagram

